

# Elite Box IP Cameras

Day/Night Dome IP Cameras – VGA - H264 Video and Audio



Low Cost Dome Camera with Crystal Clear Video!

A low cost dome camera for home or business use packed full of features from remote access from Web or 3G mobile phone to 2 way audio, analogue video out and dual high quality H.264 video streams


## Overview

The VGA dome camera is a fully featured network dome camera at a low price making it ideal for domestic to small business use. The VGA dome camera includes all the benefits of the Elite camera range from dual H.264 video and audio to a useful 3.5 ~ 8mm varifocal lens.

Additional advantages include excellent low light operation with no blurring in low light, 2 way audio, alarm / RS485 I/O options. Also includes remote access via Internet browser or 3G mobile phones. Compatible with EyeSoft

## Features

- 1/4" CMOS Image Sensor
- VGA, 640x480 pixels
- TI DaVinci DSP Processor
- Dual H.264 Video & Audio Streams
- 1 to 25/30 fps. (PAL / NTSC)
- 3.5 ~ 8mm Varifocal Lens
- 32k ~ 8Mbps Bandwidth
- Remote Internet Access
- Remote Access on 3G Mobiles
- Analogue Video In / Out
- 2 Way Audio
- Alarm & RS485 I/O
- SD Card Slot / Internal DVR
- Record Direct to NAS
- Motion Detection
- Tamper Alarm
- Privacy Mask

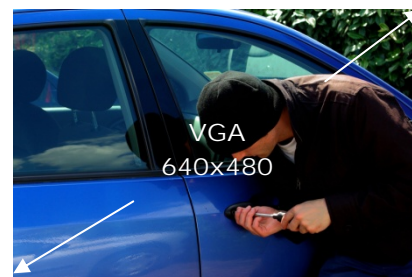

BIKAL IP CCTV LIMITED

4th Floor, 25 Eccleston Square, London, SW1V 1NS, UK

WEB: [www.bikal.co.uk](http://www.bikal.co.uk) EMAIL: [uk@bikal.co.uk](mailto:uk@bikal.co.uk) Tel: [+44 \(0\)844 804 2400](tel:+44(0)8448042400)

# Elite Box IP Cameras

Day/Night Dome IP Cameras – VGA - H264 Video and Audio



1.3/U/0209/BK

<b><u>Model</u></b>	<b>BCD732</b>
Lan Port / Speed	YES/RJ45 10/100 BaseT
Analogue Out	BNC 1.0Vp-p 75ohm
Compression	H.264 / dual stream / 32k ~8Mbps
Supported Protocols	DDNS, PPPoE, DHCP, SNTP, TCP/IP, ICMP, SMTP, HTTP, RTP, RTSP
Lens	3.5 ~ 8mm Varifocal
Frame Rate	PAL 25fps / NTSC 30fps (1,2,4,5,8,12,18,25,30 FPS)
Resolutions	640x480, 352x288, 176x144
Rotation Angle	Pan:360° Endless. Tilt:0°~90, 3 Axis Gimble
Online Users	10 concurrent
Security	Multiple Level, Password Protected
Management	BiKal EyeSoft, Internet Explorer
Image Sensor	1/3"
Sensor Type	CMOS
Auto Iris	NO
Min Illumination	0.5 LUX
BLC	Auto
Alarm I/O	YES
SD Card	YES
BNC Out	YES
Infra Red	NO
WiFi	NO
Audio	Ogg Vorbis
Power	12v/24v/POE
Operating Temp	-10~60°C
Humidity	80%
Dimension	φ157.5x130.4
Weight	900g

BIKAL IP CCTV LIMITED

4th Floor, 25 Eccleston Square, London, SW1V 1NS, UK

WEB: [www.bikal.co.uk](http://www.bikal.co.uk) EMAIL: [uk@bikal.co.uk](mailto:uk@bikal.co.uk) Tel: [+44 \(0\)844 804 2400](tel:+44208448042400)